


Galvanised O2 Achil Perforated Stair Treads

2mm thick Galvanised Steel to BS EN 1461:2009
9mm dia raised hole, 5mm dia depressed hole (Average Wet PTV50)
Loading designed in accordance with BS4592: Part 0: 2006

Length	Height	Depth	Depth	Depth	Depth	Depth	Depth
mm	mm	150	200	225	250	275	300
Item Stock Codes							
400	45	20100	20410	20770	–	–	–
500	45	20150	20420	20780	21120	–	–
600	45	20200	20450	20800	21150	21550	21950
700	45	20250	20500	20850	21200	21600	22000
800	45	20300	20550	20900	21250	21650	22050
900	45	20350	20600	20950	21300	21700	22100
1000	45	20400	20650	21000	21350	21750	22150
1100	57	–	20700	21050	21400	21800	22200
1200	57	–	20750	21100	21450	21850	22250
1500	57	–	20760	21110	21500	21900	22300

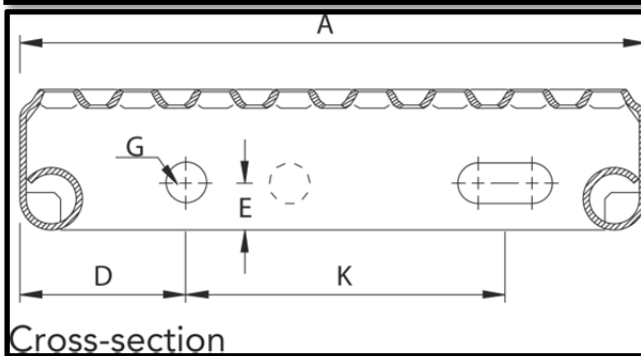

Fixing Hole Positions				
A	D	E	G	K
150	35	15	13	78
200	45	15	13	102
225	45	15	13	127
250	50	15	13	142
275	62	15	13	143
300	50	15	13	192

* Additional 13mm dia hole on tread width of 300mm - centre distance to G = 48mm