

Stainless Steel O2 Perforated Stair Treads


2mm thick Stainless Steel to BS EN 1.4301 (304)

9mm dia raised hole, 5mm dia depressed hole (PTV50)

Loading designed in accordance with BS4592: Part 0: 2006

Length	Height	Depth	Depth	Depth	Depth	Depth
mm	mm	200	225	250	275	300
500	45	●	—	—	—	—
600	45	●	●	●	—	—
700	45	●	●	●	—	—
800	45	●	●	●	●	●
900	45	●	●	●	●	●
1000	45	●	●	●	●	●
1200	45	—	—	●	—	—

● = available 7/10 working days subject to availability

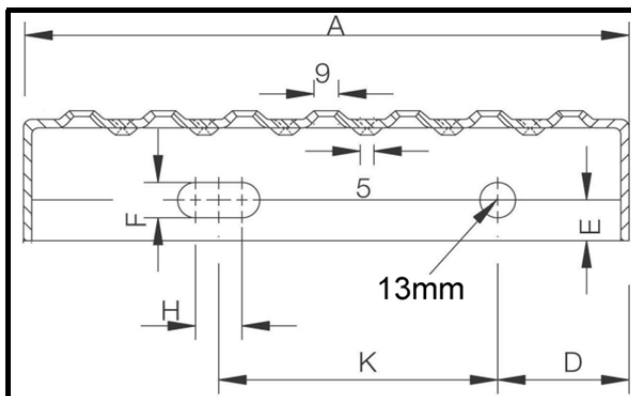

Fixing Hole Positions

A	D	E	F	H	K
200	35	15	13	17	102
225	45	15	13	17	127
250	45	15	13	17	142
275	50	15	13	17	143
300	62	15	13	17	192